



*Managed by Rio Tinto Coal Australia*

# Mount Thorley Warkworth

## Monthly Environmental Report

### August 2017

Coal & Allied Operations Pty Ltd

ABN 16 000 023 656

Putty Road, Mount Thorley via Singleton NSW 2330 Australia

PO Box 315 Singleton NSW 2330 Australia

Telephone +61 2 6570 0300 Facsimile +61 2 6570 0399

## CONTENTS

1.0	INTRODUCTION.....	4
2.0	AIR QUALITY .....	4
2.1	Meteorological Monitoring.....	4
2.1.1	Rainfall.....	4
2.1.2	Wind Speed and Direction .....	4
2.2	Depositional Dust .....	6
2.3	Suspended Particulates .....	6
2.3.1	HVAS PM <sub>10</sub> Results.....	6
2.3.2	TSP Results .....	7
2.3.3	Real Time PM <sub>10</sub> Results.....	7
2.3.4	Real Time Alarms for Air Quality .....	7
3.0	WATER QUALITY .....	8
3.1	Surface Water.....	8
3.2	Groundwater Monitoring.....	8
3.3	HRSTS Discharge .....	8
4.0	BLAST MONITORING .....	9
4.1	Blast Monitoring Results.....	9
5.0	NOISE.....	12
5.1	Attended Noise Monitoring Results.....	12
5.1.1	WML Noise Assessment .....	12
5.1.3	MTO Noise Assessment.....	13
5.1.4	INP Low Frequency Assessment.....	14
5.2	Noise Management Measures.....	16
6.0	OPERATIONAL DOWNTIME.....	16
7.0	REHABILITATION .....	16
8.0	ENVIRONMENTAL INCIDENTS.....	17
9.0	COMPLAINTS.....	17
	Appendix A: Meteorological Data.....	19

## Figures

Figure 1: Rainfall Trend YTD	4
Figure 2: Charlton Ridge Wind Rose – August 2017	4
Figure 3: Air Quality Monitoring Locations	5
Figure 4: Depositional Dust – August 2017	6
Figure 5: Individual PM <sub>10</sub> Results – August 2017	6
Figure 6: Annual Average PM <sub>10</sub> – August 2017	7
Figure 7: Annual Average Total Suspended Particulates – August 2017	7
Figure 8: Real Time PM <sub>10</sub> daily 24hr average and annual average – August 2017	8
Figure 9: Abbey Green Blast Monitoring Results – August 2017	9
Figure 10: Bulga Village Blast Monitoring Results – August 2017	9
Figure 11: MTIE Blast Monitoring Results – August 2017	10
Figure 12: Wollemi Peak Road Blast Monitoring Results - August 2017	10
Figure 13: Wambo Road Blast Monitoring Results - August 2017	10
Figure 14: Warkworth Blast Monitoring Results - August 2017	10
Figure 15: MTW Blast Monitoring Location Plan	11
Figure 16: Noise Monitoring Location Plan	15
Figure 17: Operational Downtime by Equipment Type – August 2017	16
Figure 18: Rehabilitation YTD - August 2017	17
Figure 19: Complaints Summary – YTD August 2017	18

## Tables

Table 1: Monthly Rainfall MTW	4
Table 2: Blasting Limits	9
Table 3: L <sub>Aeq, 15 minute</sub> Warkworth Impact Assessment Criteria –August 2017	12
Table 4: L <sub>A1, 1 minute</sub> Warkworth - Impact Assessment Criteria – August 2017	12
Table 5: L <sub>Aeq, 15minute</sub> Mount Thorley - Impact Assessment Criteria – August 2017	13
Table 6: L <sub>A1, 1Minute</sub> Mount Thorley - Impact Assessment Criteria – August 2017	13
Table 7: Supplementary Attended Noise Monitoring Data – August 2017	16
Table 8: Meteorological Data – Charlton Ridge Meteorological Station – August 2017	20

## Revision History

Version No.	Person Responsible	Document Status	Date
<b>1.0</b>	<b>Environmental Graduate</b>	<b>Draft</b>	<b>23/08/2017</b>
<b>1.1</b>	<b>Environmental Specialist</b>	<b>Final</b>	<b>10/10/2017</b>

## 1.0 INTRODUCTION

This report has been compiled to provide a monthly summary of environmental monitoring results for Mount Thorley Warkworth (MTW). This report includes all monitoring data collected for the period 1<sup>st</sup> August to 31<sup>st</sup> August 2017.

## 2.0 AIR QUALITY

### 2.1 Meteorological Monitoring


Meteorological data is collected at MTW's 'Charlton Ridge' meteorological station (refer to Figure 3: Air Quality Monitoring Locations).

#### 2.1.1 Rainfall

Rainfall for the period is summarised in Table 1, the year-to-date trend and historical trend are shown in Figure 1.

**Table 1: Monthly Rainfall MTW**


2017	Monthly Rainfall (mm)	Cumulative Rainfall (mm)
August	9.4	282.0

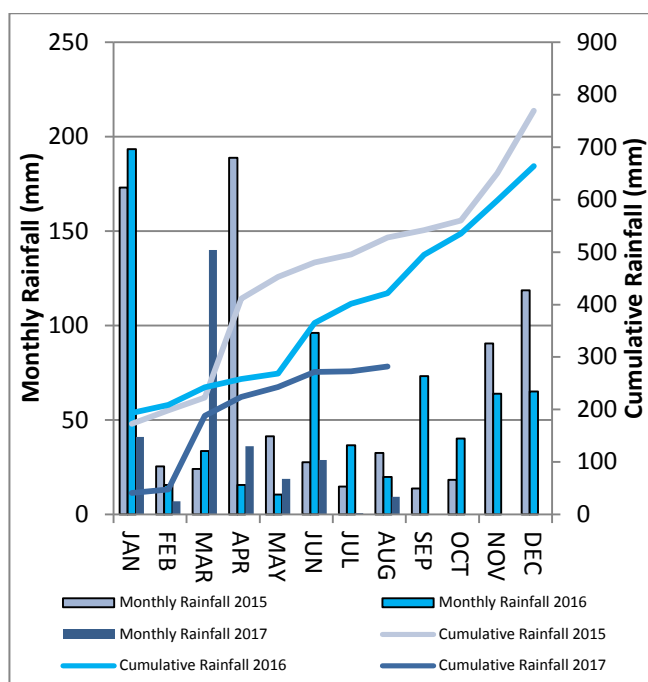

**Figure 1: Rainfall Trend YTD**

### 2.1.2 Wind Speed and Direction

Winds from the North-West were dominant throughout the reporting period as shown in Figure 2.

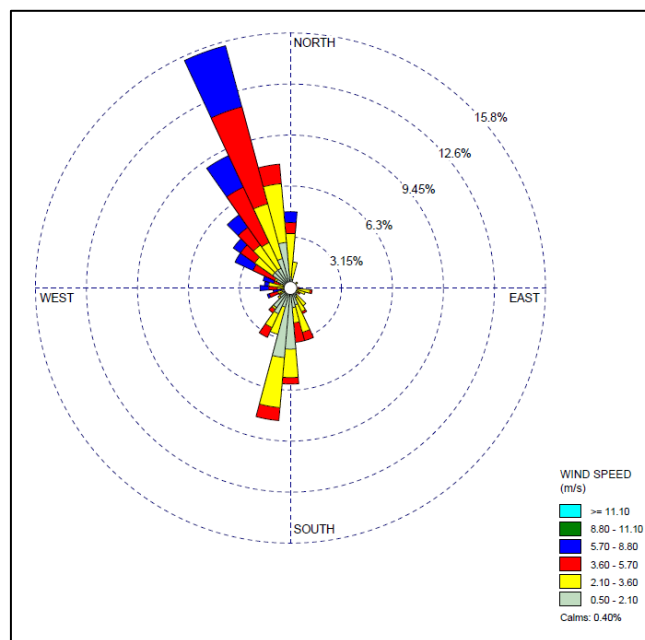


**Figure 2: Charlton Ridge Wind Rose – August 2017**



# Mount Thorley Warkworth Air Quality Monitoring Programme

Date: 170324  
Plan By: DF  
Version: 1.4

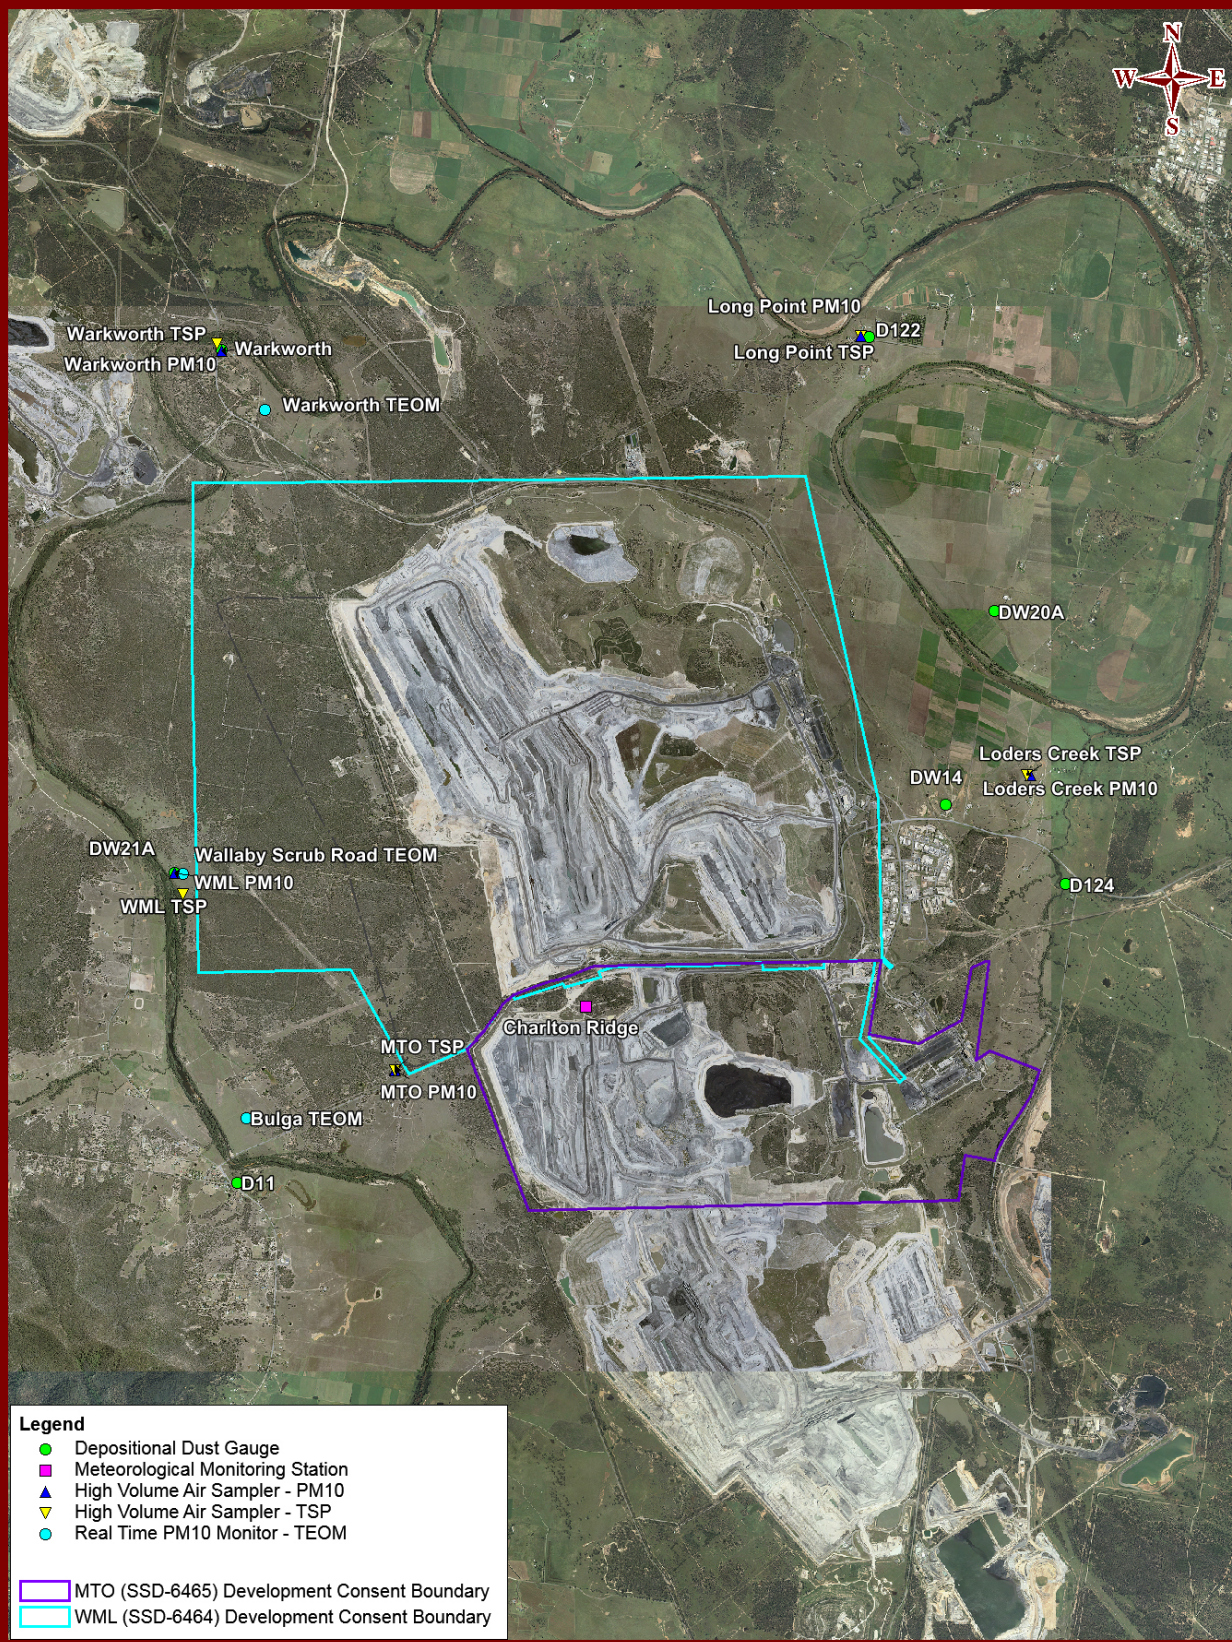

RTCA - NSW Environmental Services

**Figure 3: Air Quality Monitoring Locations**




## 2.2 Depositional Dust

To monitor regional air quality, MTW operates and maintains a network of seven depositional dust gauges, situated on private and mine owned land surrounding MTW.

Figure 4 displays insoluble solids results from depositional dust gauges during the reporting period compared against the year-to-date average and the annual impact assessment criteria.

During the reporting period the DW21a and D124 monitors recorded a monthly result above the long term impact assessment criteria of 4.0 g/m<sup>2</sup> per month. Field notes associated with DW21a and D124 confirm the presence of insects and bird droppings. As such the results are considered contaminated and will be excluded from calculation of the annual average.

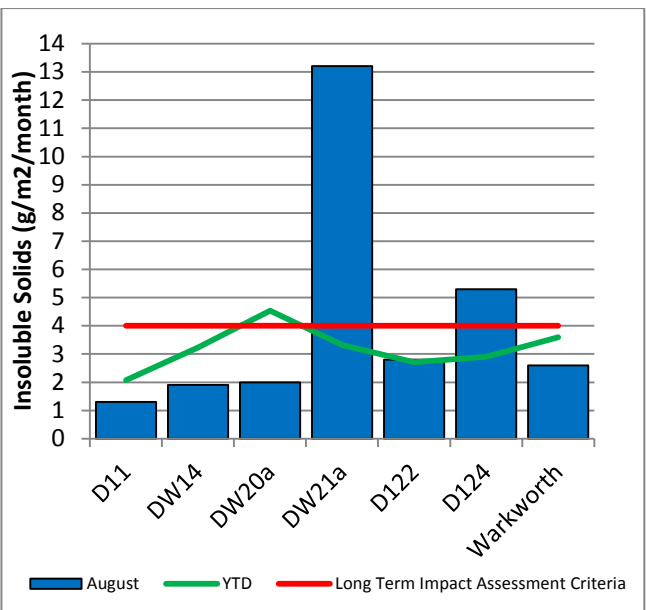

**Figure 4: Depositional Dust – August 2017**

## 2.3 Suspended Particulates

Suspended particulates are measured by a network of High Volume Air Samplers (HVAS) measuring Total Suspended Particulates (TSP) and Particulate Matter <10µm (PM<sub>10</sub>). The location of these monitors can be found in Figure 3. Each HVAS was run for 24 hours on a six-day cycle in accordance with EPA requirements.


### 2.3.1 HVAS PM<sub>10</sub> Results

Figure 5 shows the individual PM<sub>10</sub> results at each monitoring station against the short term impact assessment criteria of 50µg/m<sup>3</sup>.

On 16/08/2017 the Long Point HVAS PM<sub>10</sub> unit recorded a result of 132µg/m<sup>3</sup>, which is greater than the short term (24hr) PM<sub>10</sub> impact assessment criteria.


Investigation determined that the wind direction was not from MTW's angle of influence at Long Point on the 16<sup>th</sup> of August. Accordingly, no further action is required.

Data was not available on 22/08/2017 and 28/08/2017 at Loders Creek and on 22/08/2017 at Long Point HVAS due to technical issues.

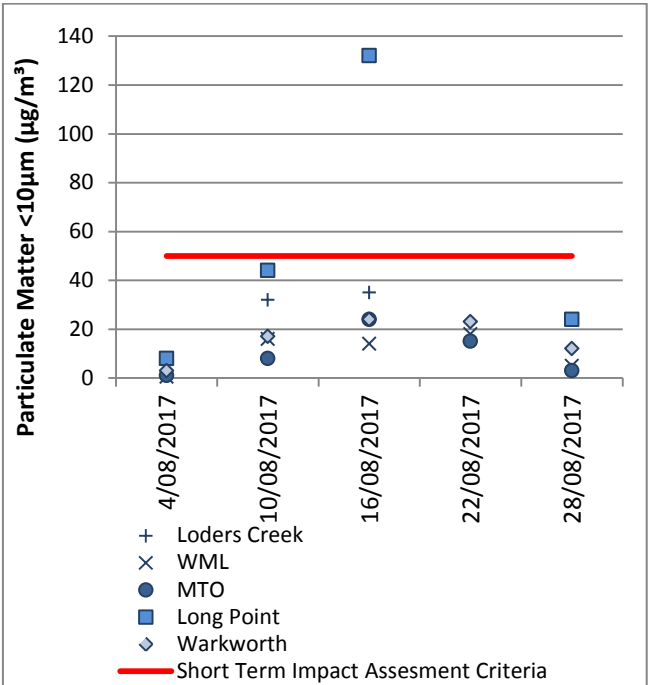

**Figure 5: Individual PM<sub>10</sub> Results – August 2017**


Figure 6 shows the annual average PM<sub>10</sub> results against the long term impact assessment criteria.

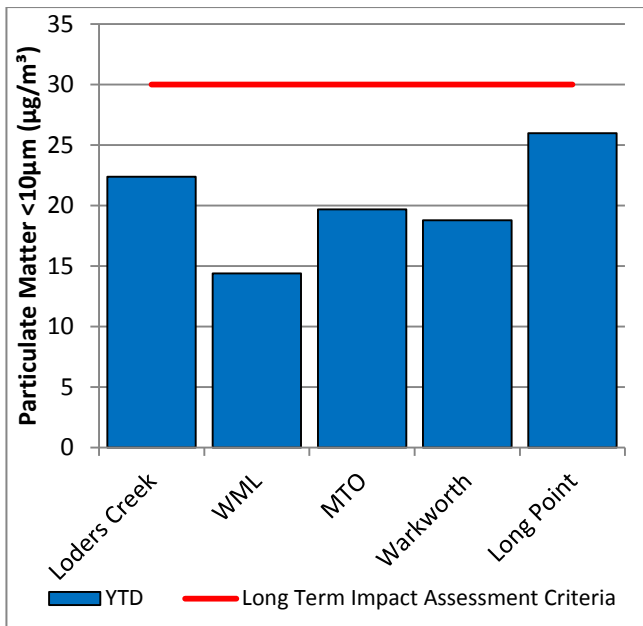

**Figure 6: Annual Average PM<sub>10</sub> – August 2017**

### 2.3.2 TSP Results

Figure 7 shows the annual average TSP results compared against the long term impact assessment criteria of 90µg/m<sup>3</sup>.

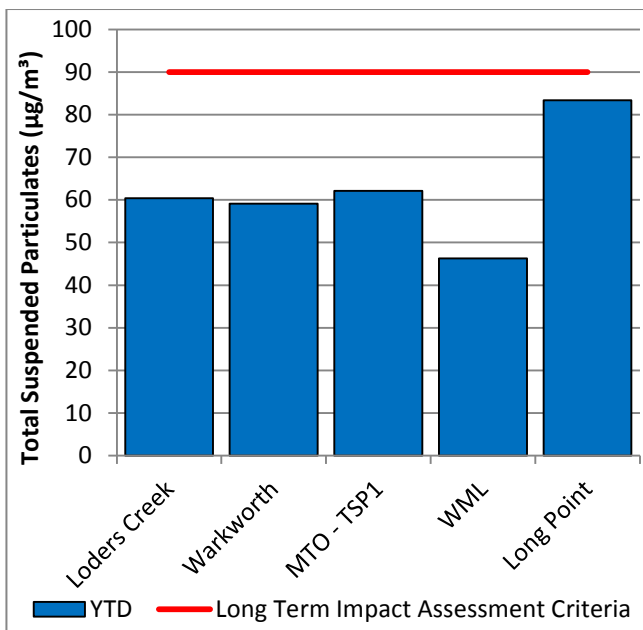

**Figure 7: Annual Average Total Suspended Particulates – August 2017**

### 2.3.3 Real Time PM<sub>10</sub> Results


Mount Thorley Warkworth maintains a network of real time PM<sub>10</sub> monitors. The real time air quality monitoring stations continuously log information and transmit data to a central database, generating alarms when particulate matter levels exceed internal trigger limits.

Results for real time dust sampling are shown in Figure 8, including the daily 24 hour average PM<sub>10</sub> result and the annual PM<sub>10</sub> average.

Data was not available on 4<sup>th</sup> and 7<sup>th</sup> August 2017 (Bulga) due to technical issues.

### 2.3.4 Real Time Alarms for Air Quality

During August, the real time monitoring system generated 81 automated air quality related alerts, including 27 alerts for adverse meteorological conditions and 54 alerts for elevated PM<sub>10</sub> levels.

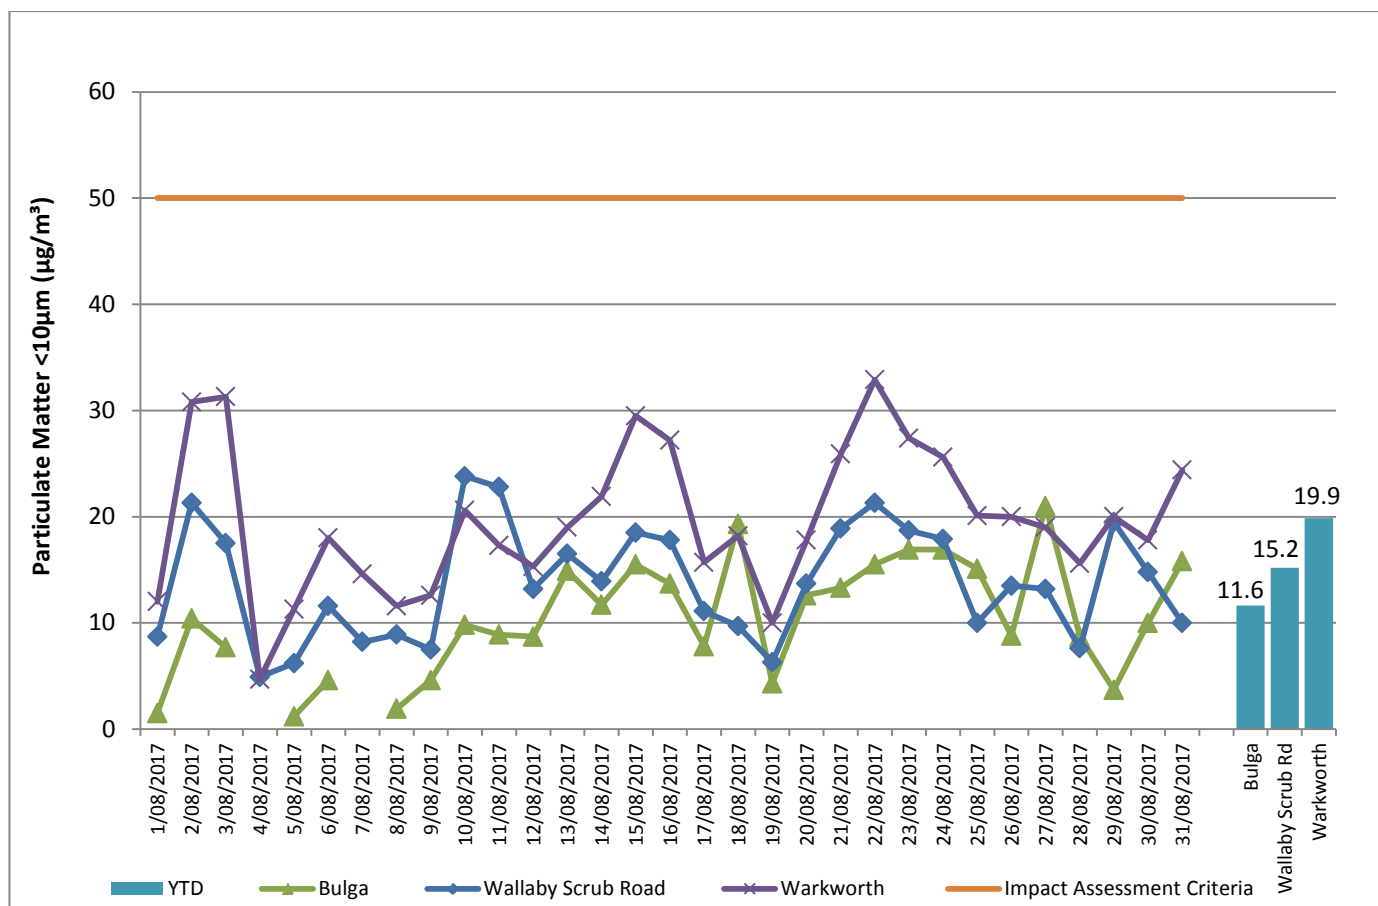

**Figure 8: Real Time PM<sub>10</sub> daily 24hr average and annual average – August 2017**

### 3.0 WATER QUALITY

MTW maintains a network of surface water and groundwater monitoring sites.

#### 3.1 Surface Water

Monitoring is conducted at mine site dams and surrounding natural watercourses.

Surface water courses are sampled on a monthly or quarterly sampling regime. Water quality is evaluated through the parameters of pH, Electrical Conductivity (EC) and Total Suspended Solids (TSS). The Hunter River and the Wollombi Brook are sampled both upstream and downstream of mining operations, to monitor the potential impact of mining on the river. Other Hunter River tributaries are also monitored.

Results of monitoring are reported quarterly, next available in the September 2017 report.

#### 3.2 Groundwater Monitoring

Groundwater monitoring is undertaken on a quarterly basis in accordance with the MTW Groundwater Monitoring Programme.

Groundwater results are reported quarterly, next available in the September 2017 report.

#### 3.3 HRSTS Discharge

MTW participates in the Hunter River Salinity Trading Scheme (HRSTS), allowing discharge from licensed discharge points Dam 1N and Dam 9S. Discharges can only take place subject to HRSTS regulations.

During the reporting period no water was discharged under the HRSTS.

## 4.0 BLAST MONITORING

MTW have a network of six blast monitoring units. These are located at nearby privately owned residences and function as regulatory compliance monitors.

The location of these monitors can be found in Figure 15.


### 4.1 Blast Monitoring Results

During August 2017, 29 blasts were initiated at MTW. Figure 9 to Figure 14 show the blast monitoring results for the reporting period against the impact assessment criteria. The criteria are summarised in Table 2.


**Table 2: Blasting Limits**

Airblast Overpressure (dB(L))	Comments
115	5% of the total number of blasts in a 12 month period
120	0%
Ground Vibration (mm/s)	Comments
5	5% of the total number of blasts in a 12 month period
10	0%


During the reporting period no blasts exceeded the 115 dB(L) 5% threshold for airblast overpressure or 5mm/s 5% threshold for ground vibration.

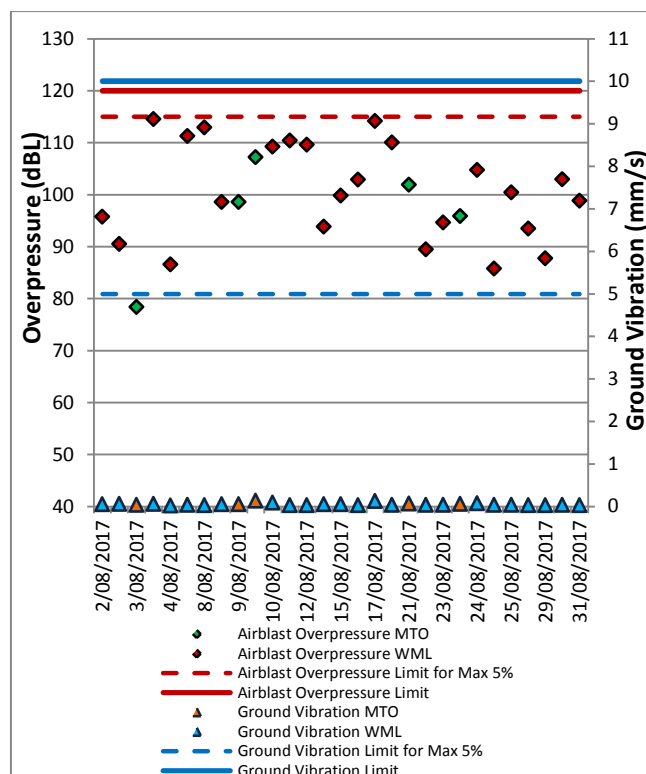


**Figure 9: Abbey Green Blast Monitoring Results – August 2017**

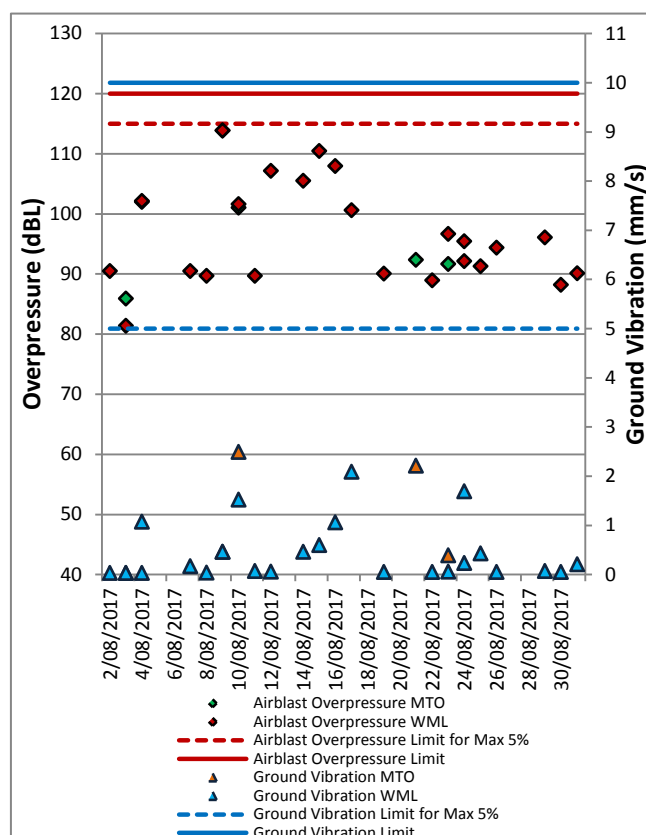


**Figure 10: Bulga Village Blast Monitoring Results – August 2017**

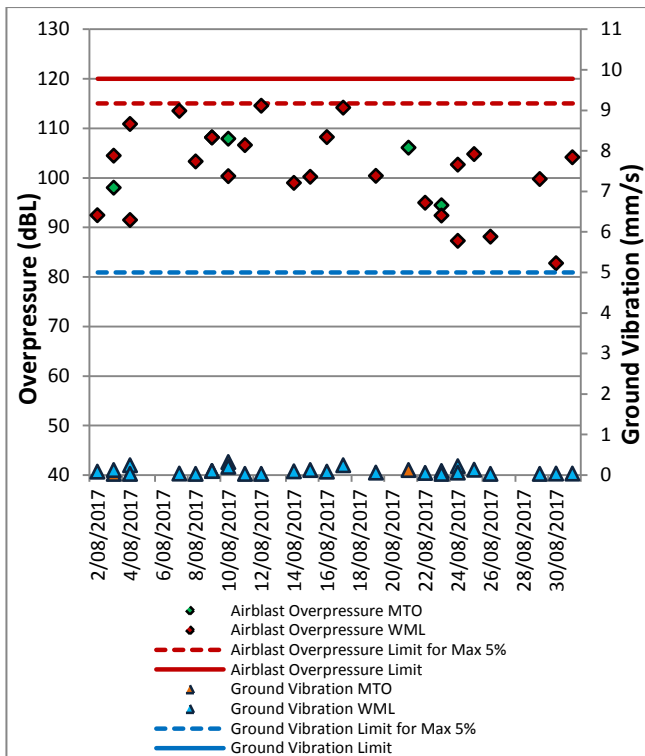


**Figure 11: MTIE Blast Monitoring Results – August 2017**

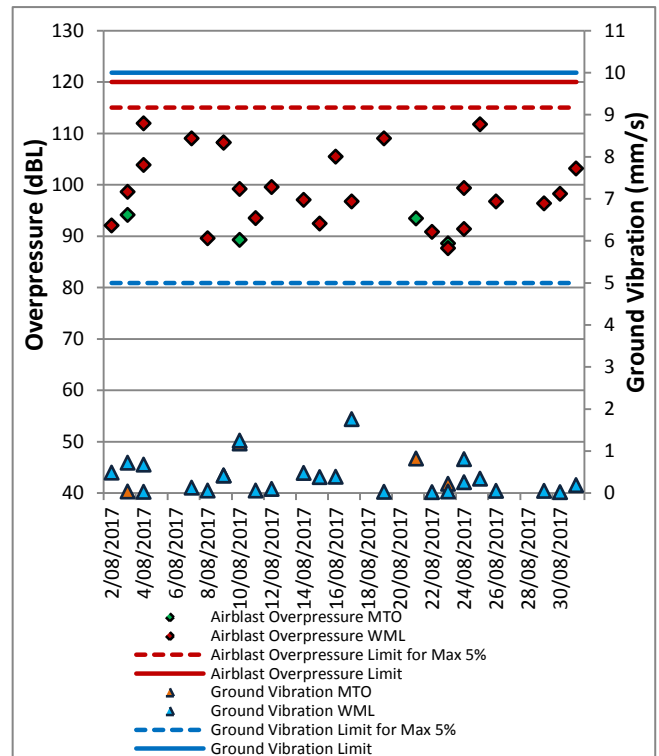

**Figure 13: Wambo Road Blast Monitoring Results - August 2017**

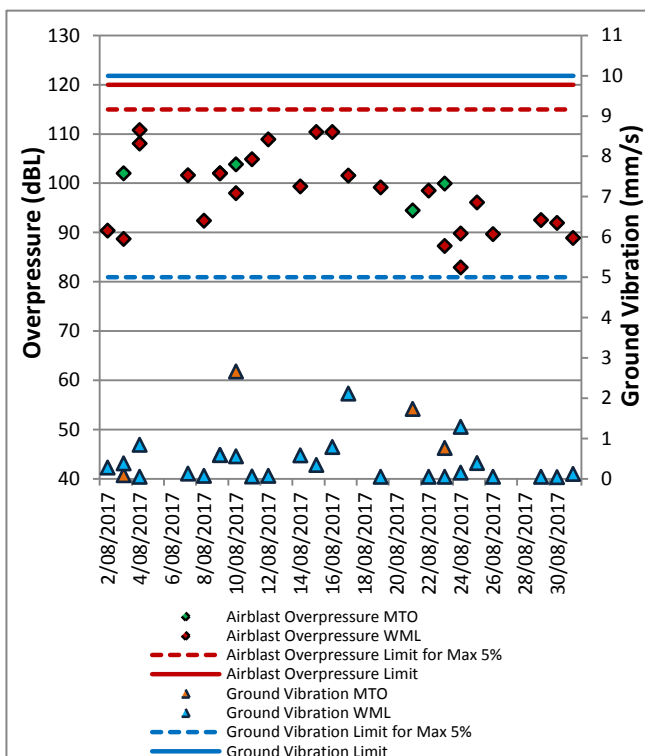

**Figure 12: Wollemi Peak Road Blast Monitoring Results - August 2017**

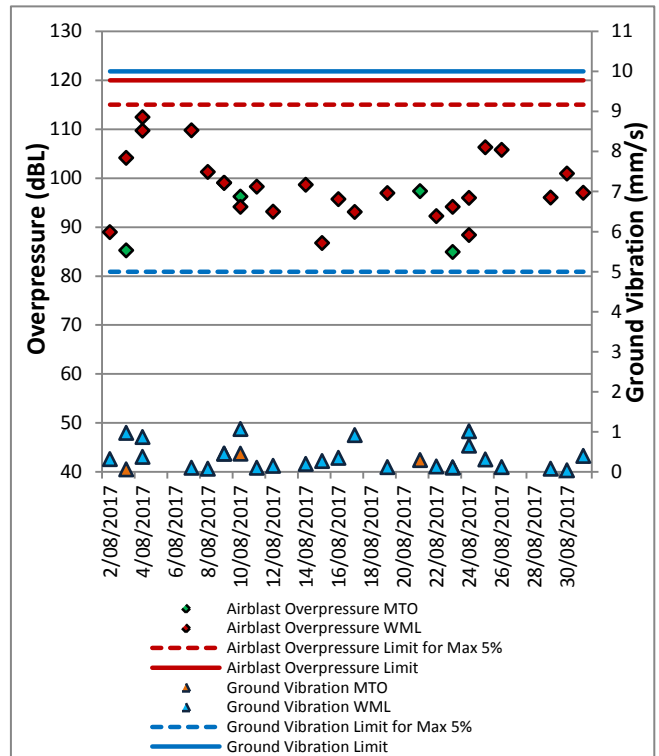

**Figure 14: Warkworth Blast Monitoring Results - August 2017**



**Mount Thorley Warkworth  
Blast Monitoring Locations**

Date: 160621  
Plan By: DF  
Version: 4.0



RTCA - NSW Environmental Services

**Figure 15: MTW Blast Monitoring Location Plan**



## 5.0 NOISE

Routine attended noise monitoring is carried out in accordance with the MTW Noise Management Plan. A review against EIS predictions will be reported in the Annual Review. The purpose of the noise surveys is to quantify and describe the acoustic environment around the site and compare results with specified limits. Real time noise monitoring also occurs at nine sites surrounding MTW. Noise monitoring locations are displayed in Figure 16.

### 5.1 Attended Noise Monitoring Results

Attended monitoring was conducted at receiver locations surrounding MTW on the night of 2<sup>nd</sup>/3<sup>rd</sup> August 2017. All measurements complied with the relevant criteria. Results are detailed in Table 3 to Table 6.

#### 5.1.1 WML Noise Assessment

Compliance assessments undertaken against the WML noise criteria are presented in Tables 3 and 4.

**Table 3: LAeq, 15 minute Warkworth Impact Assessment Criteria –August 2017**

Location	Date and Time	Wind Speed (m/s) <sup>5</sup>	Stability Class	Criterion (dB(A))	Criterion Applies? <sup>1,5</sup>	WML LAeq dB <sup>2,4</sup>	Exceedance <sup>3</sup>	Total LCeq – LAeq	Revised WML LAeq <sup>5,6</sup>
Bulga RFS	3/08/2017 0:25	2.2	D	37	Yes	NM	Nil	16	NM
Bulga Village	2/08/2017 21:56	1.1	F	38	Yes	<30	Nil	17	<35
Gouldsville	2/08/2017 21:24	1	E	38	Yes	33	Nil	21	38
Inlet Rd	2/08/2017 21:30	1	E	37	Yes	<30	Nil	19	<35
Inlet Rd West	2/08/2017 21:04	1.7	D	35	Yes	<30	Nil	20	<35
Long Point	2/08/2017 21:00	1.7	D	35	Yes	NM	Nil	14	NM
South Bulga	2/08/2017 23:29	2.1	E	35	Yes	NM	Nil	18	NM
Wambo Road	2/08/2017 22:26	1.9	D	38	Yes	<30	Nil	15	<35

Notes:

1. Noise emission limits apply during all meteorological conditions except the following: during periods of rain or hail; average wind speed at microphone height exceeds 5 m/s; wind speeds greater than 3 m/s measured at 10 metres above ground level; stability category F temperature inversion conditions and wind speeds greater than 2m/s at 10m above ground level; or stability category G temperature inversion conditions;
2. Estimated or measured LAeq, 15minute attributed to WML;
3. NA means atmospheric conditions outside conditions specified in development consent and so criterion is not applicable;
4. Bolded results in red are possible exceedances of relevant criteria; and
5. Criterion may or may not apply due to rounding of meteorological data values.
6. Revised LAeq, 15minute level following application of low frequency noise penalty as per the INP where applicable.

**Table 4: LA1, 1 minute Warkworth - Impact Assessment Criteria – August 2017**

Location	Date and Time	Wind Speed (m/s) <sup>5</sup>	Stability Class	Criterion dB	Criterion Applies? <sup>1,5</sup>	WML LA1, 1min dB <sup>2,4</sup>	Exceedance <sup>3</sup>
Bulga RFS	3/08/2017 0:25	2.2	D	47	Yes	NM	Nil
Bulga Village	2/08/2017 21:56	1.1	F	48	Yes	34	Nil
Gouldsville	2/08/2017 21:24	1	E	48	Yes	42	Nil
Inlet Rd	2/08/2017 21:30	1	E	47	Yes	30	Nil
Inlet Rd West	2/08/2017 21:04	1.7	D	45	Yes	<30	Nil
Long Point	2/08/2017 21:00	1.7	D	45	Yes	NM	Nil
South Bulga	2/08/2017 23:29	2.1	E	45	Yes	NM	Nil
Wambo Road	2/08/2017 22:26	1.9	D	48	Yes	32	Nil

Notes



1. Noise emission limits apply during all meteorological conditions except the following: during periods of rain or hail; average wind speed at microphone height exceeds 5 m/s; wind speeds greater than 3 m/s measured at 10 metres above ground level; stability category F temperature inversion conditions and wind speeds greater than 2m/s at 10m above ground level; or stability category G temperature inversion conditions;
2. Estimated or measured LA1,1minute attributed to Warkworth mine (WML);
3. NA in exceedance column means atmospheric conditions outside conditions specified in project approval and so criterion is not applicable. NA (not applicable) in criterion column means criterion not specified for this location;
4. Bolded results in red are possible exceedances of relevant criteria; and
5. Criterion may or may not apply due to rounding of meteorological data values.

### 5.1.3 MTO Noise Assessment

Compliance assessments undertaken against the MTO noise criteria are presented in Tables 5 and 6.

**Table 5: LAeq, 15minute Mount Thorley - Impact Assessment Criteria – August 2017**

Location	Date and Time	Wind Speed (m/s) <sup>5</sup>	Stability Class	Criterion dB	Criterion Applies? <sup>1,5</sup>	MTO LAeq dB <sup>2,4</sup>	Exceedance <sup>3</sup>	Total LCeq – LAeq <sup>7</sup>	Revised MTO LAeq <sup>5,6</sup>
Bulga RFS	3/08/2017 0:25	2.2	D	37	Yes	NM	Nil	16	NM
Bulga Village	2/08/2017 21:56	1.1	F	38	Yes	<30	Nil	17	<35
Gouldsville	2/08/2017 21:24	1	E	35	Yes	IA	Nil	21	IA
Inlet Rd	2/08/2017 21:30	1	E	37	Yes	<30	Nil	19	<35
Inlet Rd West	2/08/2017 21:04	1.7	D	35	Yes	<30	Nil	20	<35
Long Point	2/08/2017 21:00	1.7	D	35	Yes	<30	Nil	14	<35
South Bulga	2/08/2017 23:29	2.1	E	36	Yes	32	Nil	18	37
Wambo Road	2/08/2017 22:26	1.9	D	38	Yes	NM	Nil	15	NM

**Notes:**

1. Noise emission limits apply during all meteorological conditions except the following: during periods of rain or hail; average wind speed at microphone height exceeds 5 m/s; wind speeds greater than 3 m/s measured at 10 metres above ground level; stability category F temperature inversion conditions and wind speeds greater than 2m/s at 10m above ground level; or stability category G temperature inversion conditions;
2. Estimated or measured LAeq, 15minute attributed to WML;
3. NA means atmospheric conditions outside conditions specified in development consent and so criterion is not applicable;
4. Bolded results in red are possible exceedances of relevant criteria; and
5. Criterion may or may not apply due to rounding of meteorological data values.
6. Revised LAeq, 15minute level following application of low frequency noise penalty as per the INP where applicable.

**Table 6: LA1, 1Minute Mount Thorley - Impact Assessment Criteria – August 2017**

Location	Date and Time	Wind Speed (m/s) <sup>5</sup>	Stability Class	Criterion dB	Criterion Applies? <sup>1,5</sup>	MTO LA1, 1min dB <sup>2,4</sup>	Exceedance <sup>3</sup>
Bulga RFS	3/08/2017 0:25	2.2	D	47	Yes	NM	Nil
Bulga Village	2/08/2017 21:56	1.1	F	48	Yes	NM	Nil
Gouldsville	2/08/2017 21:24	1	E	45	Yes	IA	Nil
Inlet Rd	2/08/2017 21:30	1	E	47	Yes	32	Nil
Inlet Rd West	2/08/2017 21:04	1.7	D	45	Yes	<30	Nil
Long Point	2/08/2017 21:00	1.7	D	45	Yes	<30	Nil
South Bulga	2/08/2017 23:29	2.1	E	46	Yes	39	Nil
Wambo Road	2/08/2017 22:26	1.9	D	48	Yes	NM	Nil

**Notes**

1. Noise emission limits apply during all meteorological conditions except the following: during periods of rain or hail; average wind speed at microphone height exceeds 5 m/s; wind speeds greater than 3 m/s measured at 10 metres above ground level; stability category F temperature inversion conditions and wind speeds greater than 2m/s at 10m above ground level; or stability category G temperature inversion conditions;
2. Estimated or measured LA1, 1minute attributed to Mt Thorley Operations (MTO);
3. NA in exceedance column means atmospheric conditions outside conditions specified in project approval and so criterion is not applicable. NA (not applicable) in criterion column means criterion not specified for this location;
4. Bolded results in red are possible exceedances of relevant criteria; and
5. Criterion may or may not apply due to rounding of meteorological data values.

#### **5.1.4 INP Low Frequency**

In accordance with the requirements of the NSW Industrial Noise Policy (INP), the low frequency modification factor has been applied where appropriate. It should be noted that the Industrial Noise Policy does not give guidance on the application of the penalty where more than one target noise source is audible. The  $L_{Ceq}$  levels reported above are “Total”, or “Total mine noise” at best, and cannot be attributed accurately to a single mine. Accordingly, where the INP criteria for the application of the Low Frequency modification factor is triggered, the penalty has been applied to the dominant mine noise source (either of WML or MTO), as such resulting in the application of a 5 dB penalty to the site only  $L_{Aeq}$  for the measurements taken at Bulga Village, Gouldsville, Inlet Road and Inlet Road West, Long Point, South Bulga and Wambo Road.

Resulting  $L_{Aeq}$  noise levels exceed the MTO impact assessment criteria at South Bulga by 1 dB due to the application of a 5 dB penalty to the site only  $L_{Aeq}$ .

MTW reports these measurements so as to ensure full disclosure, however it remains MTW’s position that the prescribed methodology is unsuitable when applied to receptors at large distances from mine noise sources due to the nature of noise attenuation. Excess attenuation of noise with distance is greater for high frequency noise than it is for low frequency noise. At significant distance from a noise source (such as private residences from the MTW complex) this often results in large differentials between  $L_{Aeq}$  and  $L_{Ceq}$ . The NSW Industrial Noise Policy requires the penalty to be applied in these instances, irrespective of actual low frequency affectation. As such, MTW does not consider these instances to constitute non-compliance with the conditions of approval.

The results have been reported to the Department of Planning and Environment.



**Mount Thorley Warkworth  
Noise Monitoring Programme**

Date: 160226

Plan By: DF

Version: 2.0



**Figure 16: Noise Monitoring Location Plan**



## 5.2 Noise Management Measures

A program of targeted supplementary attended noise monitoring is in place at MTW, supported by the real-time directional monitoring network and ensuring the highest level of noise management is maintained. The supplementary program is undertaken by MTW personnel and involves:

- Routine inspections from both inside and outside the mine boundary;
- Routine and as-required handheld noise assessments (undertaken in response to noise alarm and/or community complaint), comparing measured levels against consent noise limits; and
- Validation monitoring following operational modifications to assess the adequacy of the modifications.

Where a noise assessment identifies noise emissions which are exceeding the relevant noise limit(s) for any particular residence, modifications will be made so as to ensure that the noise event is resolved within 75 minutes of identification. The actions taken are commensurate with the nature and severity of the noise event, but can include:

- Changing the haul route to a less noise sensitive haul;
- Changing dump locations (in-pit or less exposed dump option);
- Reducing equipment numbers;
- Shut down of task; or
- Site shut down.

A summary of these assessments undertaken during August are provided in Table 7.


**Table 7: Supplementary Attended Noise Monitoring Data – August 2017**

No. of assessments	No. of assessments > trigger	No. of nights where assessments > trigger	% greater than trigger
514	0	0	0

Note: Measurements are taken under all meteorological conditions, including conditions under which the consent noise criteria do not apply.

## 6.0 OPERATIONAL DOWNTIME


During August, a total of 1283.2 hours of equipment downtime was logged in response to environmental events such as dust, noise and adverse meteorological conditions. Operational downtime by equipment type is shown in Figure 17.

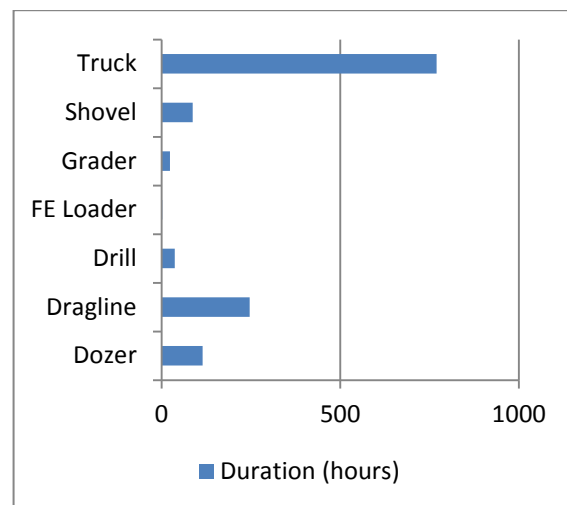

**Figure 17: Operational Downtime by Equipment Type – August 2017**

## 7.0 REHABILITATION

During August, 21.04 Ha of land was released, 8.20 Ha of land was bulk shaped, 22.96 Ha of land was topsoiled, 9.51 Ha of land was composted and 5.23 Ha of land was rehabilitated.

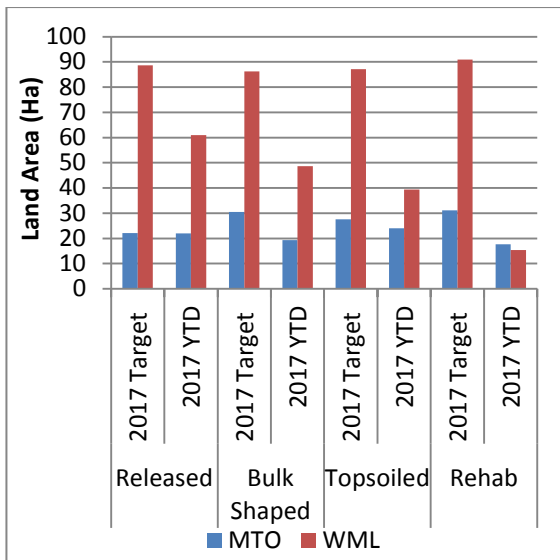

**Figure 18: Rehabilitation YTD - August 2017**

## 8.0 ENVIRONMENTAL INCIDENTS

During the reporting period there were no reportable environmental incidents.

## 9.0 COMPLAINTS

During the reporting period 36 complaints were received. Details of these complaints are shown in Figure 19 below.

	Noise	Dust	Blast	Lighting	Other	Total
January	5	6	3	1	0	15
February	25	3	10	3	0	41
March	14	1	1	2	0	18
April	27	1	7	2	0	37
May	18	4	7	10	3	42
June	10	3	4	3	0	20
July	10	10	8	0	2	30
August	8	18	5	4	1	36
September	-	-	-	-	-	-
October	-	-	-	-	-	-
November	-	-	-	-	-	-
December	-	-	-	-	-	-
Total	117	46	45	25	6	239

**Figure 19: Complaints Summary – YTD August 2017**

**Appendix A: Meteorological Data**

**Table 8: Meteorological Data – Charlton Ridge Meteorological Station – August 2017**

Date	Air Temperature Maximum (°C)	Air Temperature Minimum (°C)	Relative Humidity Maximum (%)	Relative Humidity Minimum (%)	Solar Radiation Maximum (W/Sq. M)	Wind Direction Average (°)	Wind Speed Average (m/sec)	Rainfall(mm)
1/08/2017	18.7	3.9	90.3	30.1	674	219.0	2.2	0.0
2/08/2017	18.1	2.8	86.6	26.3	672	173.2	1.6	0.0
3/08/2017	18.6	3.2	94.4	46.3	718	169.7	2.4	9.2
4/08/2017	14.4	7.6	94.7	49.9	993	298.1	5.0	0.2
5/08/2017	19.0	9.2	68.9	29.2	790	305.5	4.6	0.0
6/08/2017	20.7	6.9	66.1	26.1	758	280.8	4.2	0.0
7/08/2017	18.4	6.8	65.3	25.7	916	295.5	4.5	0.0
8/08/2017	19.1	6.3	64.7	20.7	735	294.8	4.7	0.0
9/08/2017	19.1	4.0	76.6	32.3	731	336.0	2.2	0.0
10/08/2017	23.2	4.4	79.8	18.7	765	267.8	3.4	0.0
11/08/2017	27.0	12.9	40.2	11.1	721	299.2	4.9	0.0
12/08/2017	20.8	4.9	70.9	23.0	805	282.1	3.3	0.0
13/08/2017	21.5	3.6	77.8	20.9	740	197.4	2.0	0.0
14/08/2017	21.9	3.1	88.8	17.2	849	242.6	2.2	0.0
15/08/2017	25.0	7.0	67.1	20.9	962	243.2	2.5	0.0
16/08/2017	22.9	11.8	46.3	15.5	851	316.0	4.9	0.0
17/08/2017	22.0	7.5	56.7	16.9	768	299.3	5.0	0.0
18/08/2017	16.5	8.9	47.3	24.9	974	274.8	5.0	0.0
19/08/2017	16.3	5.9	50.7	20.8	863	226.2	3.0	0.0
20/08/2017	16.6	3.6	80.7	30.3	936	180.1	1.8	0.0
21/08/2017	16.4	3.1	87.5	27.4	747	229.9	2.2	0.0
22/08/2017	20.7	6.1	76.9	20.2	752	154.1	2.1	0.0
23/08/2017	23.9	4.5	90.4	20.9	739	194.0	2.1	0.0
24/08/2017	20.7	5.7	66.7	22.9	911	190.3	2.6	0.0
25/08/2017	17.8	5.1	80.1	35.2	1021	176.8	3.2	0.0
26/08/2017	20.1	4.2	85.2	22.7	782	212.4	2.3	0.0
27/08/2017	19.6	4.3	63.2	18.0	808	268.4	3.6	0.0
28/08/2017	16.3	3.6	67.1	27.1	930	186.0	2.6	0.0
29/08/2017	18.2	2.6	87.6	23.7	986	169.8	1.7	0.0
30/08/2017	20.8	5.5	92.3	14.9	812	186.1	2.2	0.0
31/08/2017	17.8	4.7	66.3	24.2	819	170.5	2.6	0.0